



INSTALLATION INSTRUCTIONS

Accessory

DOOR EDGE GUARDS

Application

2003 RSX

Publications No.


BII 24447

Issue Date


SEP 2002

PARTS LIST


Right front door edge guard

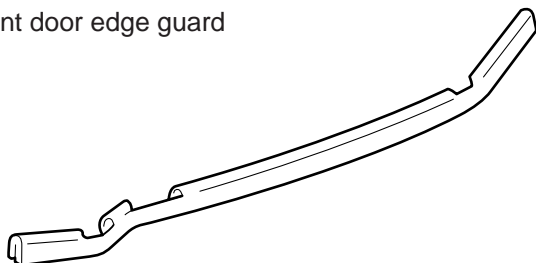

Left front door edge guard

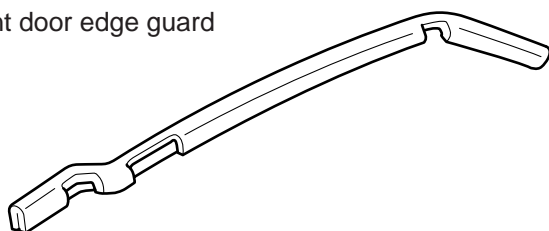

Seam sealant cutting tool



TOOLS AND SUPPLIES REQUIRED

Rubber mallet


Felt-tip pen

Touch-up paint

INSTALLATION



1. Clean and wax the two areas to be covered with a high-quality paste wax.
2. Identify each door edge guard by holding it up to the door and matching its contour with the door edge.

3. Hold the guard against the inside edge of the door, and mark the sealant at the top and bottom ending points of the door edge guard with a felt-tip pen.

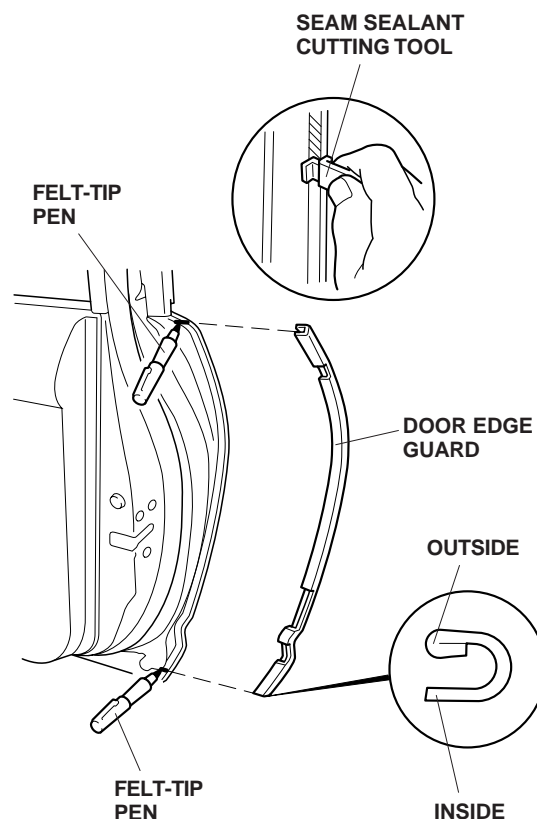

4. Position the cutting edge of the seam sealant cutting tool against the door edge, and trim the seam sealant from mark to mark.

5. Apply touch-up paint to the door, and let it dry.
6. Position the door edge guard on the door edge, and tap it into position with a series of light taps using a rubber mallet.

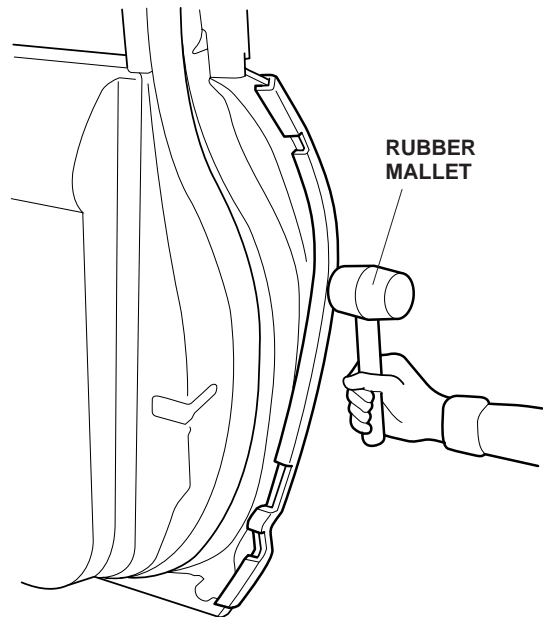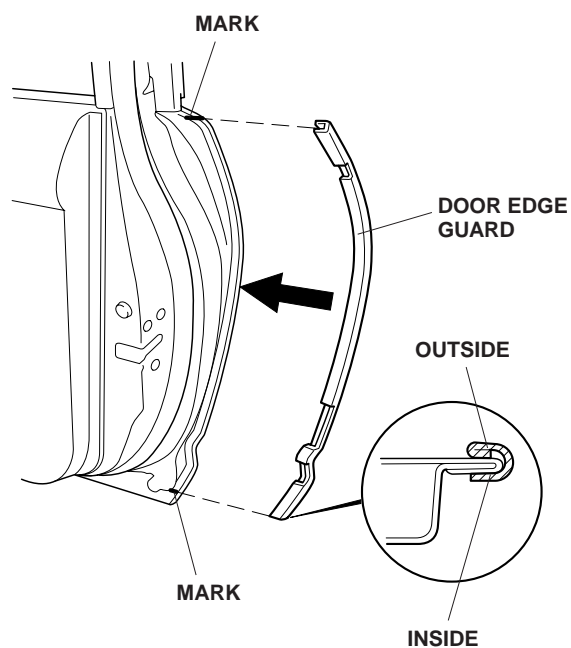

7. Repeat steps 3 through 6 to install the other door edge guard.