



INSTALLATION INSTRUCTIONS

Accessory

FRONT UNDER SPOILER

Application

2003 RSX

Publications No.


BII 24452

Issue Date

SEP 2002

PARTS LIST

Front under spoiler

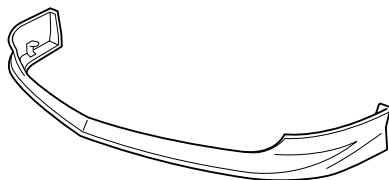

6 Flange bolts



4 Washer-screws




4 Clip nuts



4 Spring nuts



2 Short expansion clips



TOOLS AND SUPPLIES REQUIRED

Phillips screwdriver

Flat-tip screwdriver

Ratchet

10 mm Socket

Masking tape

Isopropyl alcohol


Shop towel

INSTALLATION


NOTE: Be careful not to damage the front bumper and the body paint finish.

1. Remove the four clips and the two bolts that secure the front air spoiler, then remove the spoiler by pulling the spoiler toward you to release the six retaining tabs.


FRONT AIR
SPOILER
(Save for your
customer.)

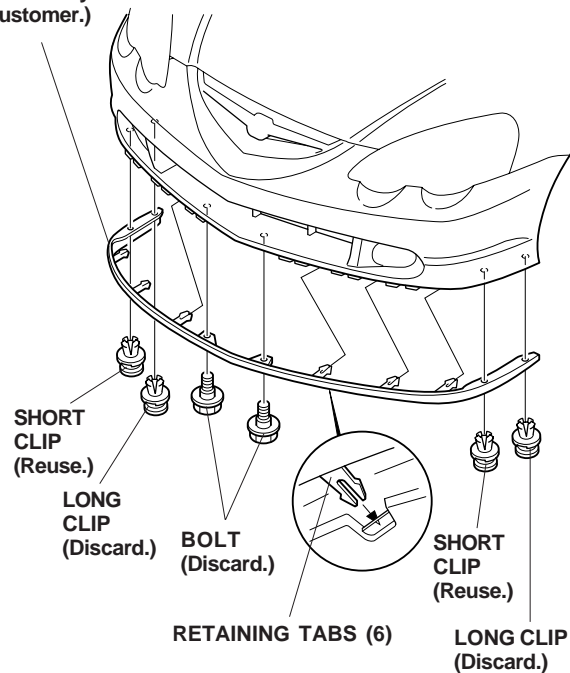

- Remove the two self-tapping screws from the front bumper. Slide the four spring nuts (two on each side) over the dimpled areas of the front bumper. Install two short expansion clips (from the kit) in the holes on both sides of the front bumper, then slide the four clip nuts onto the bottom flange of the front bumper through the cutouts.

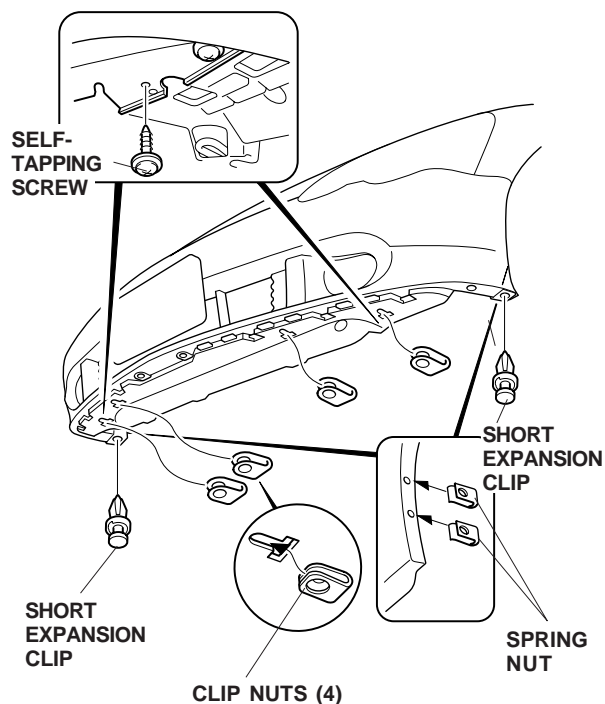


- On the inside of the spoiler, peel back about 2 inches of the adhesive backing, and tape it to the front of the spoiler with masking tape. Repeat on the other side.

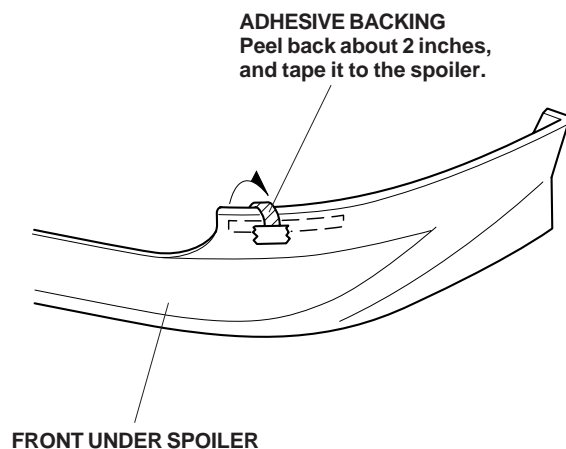


- Using isopropyl alcohol on a shop towel, thoroughly clean the area where the front under spoiler will attach.

- Fit the front under spoiler into position on the front bumper by sliding the four retaining tabs into the holes in the bumper flange, then install the six flange bolts, the four washer-screws, and the two clips.

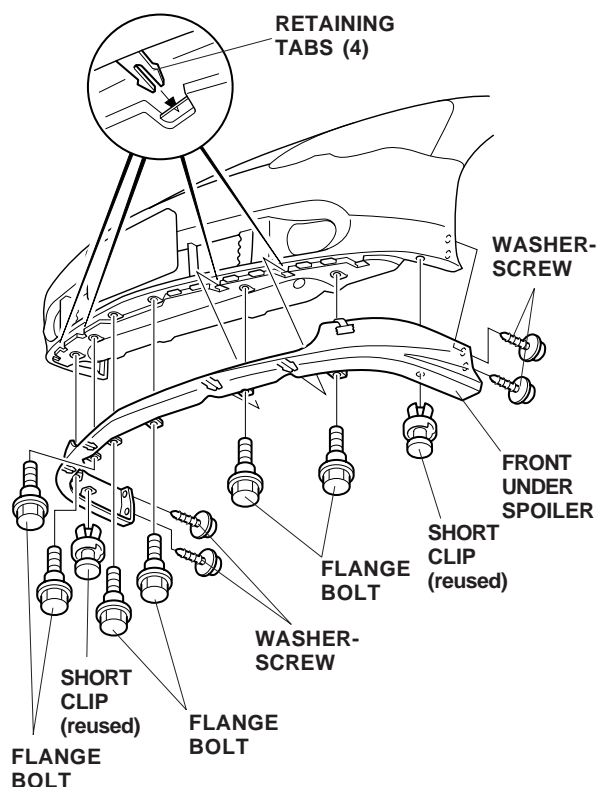

- While holding light pressure on the front under spoiler, slowly and carefully remove the adhesive backings from the front under spoiler in the direction shown. Press on the front under spoiler with the palm of your hand for 30 seconds.

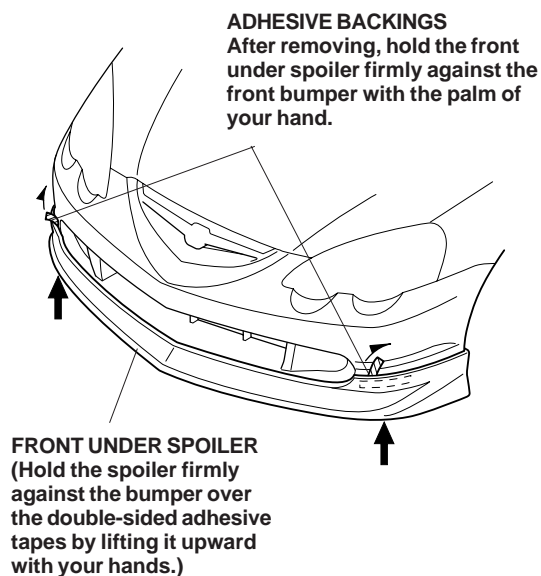

Please give a copy of this page to your customer.

- Be sure to remove the front bumper and the front under spoiler when using the towing hooks. Damage to the front bumper, the front under spoiler and the body frame will result if this instruction is not followed.
- Have the front bumper and the front under spoiler removed and reinstalled by your authorized Acura dealer.

