

ACURA **INSTALLATION** **INSTRUCTIONS**


Accessory
EXHAUST
PIPE FINISHER
P/N 08F53-S6M-200

Application
2003 RSX


Publications No.
BII 24449
 Issue Date
SEP 2002

PARTS LIST

Exhaust pipe
 finisher



Bolt




TOOLS REQUIRED

10 mm Socket
 Torque wrench


INSTALLATION

NOTE: Allow the exhaust pipe to cool down before you install the exhaust pipe finisher.


1. Remove the original exhaust pipe finisher.
2. Partially thread the bolt into the exhaust pipe finisher.

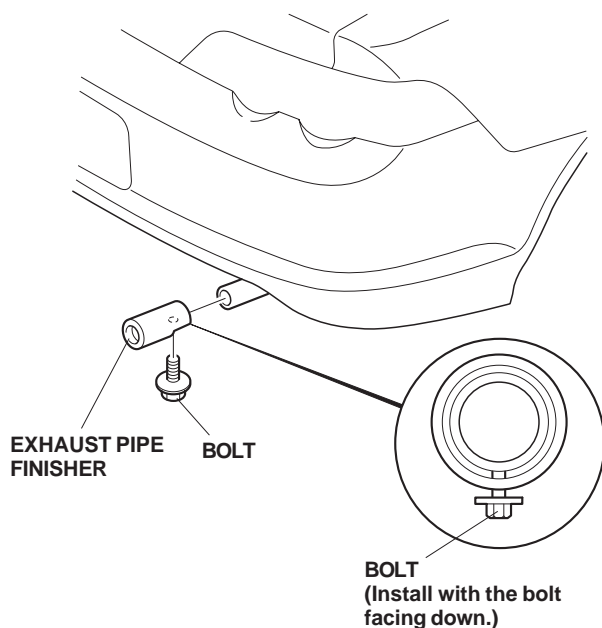

3. With the bolt facing down, slide the exhaust pipe finisher onto the exhaust pipe until it bottoms against the exhaust pipe.

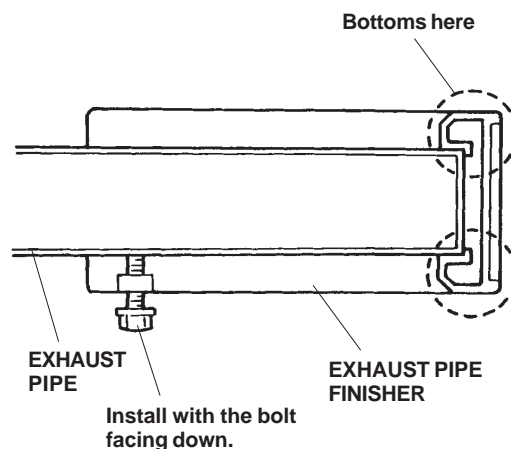

4. While pushing the exhaust pipe finisher firmly against the exhaust pipe, torque the 6 mm bolt to 7 to 12 N•m (5 to 8 lb-ft).

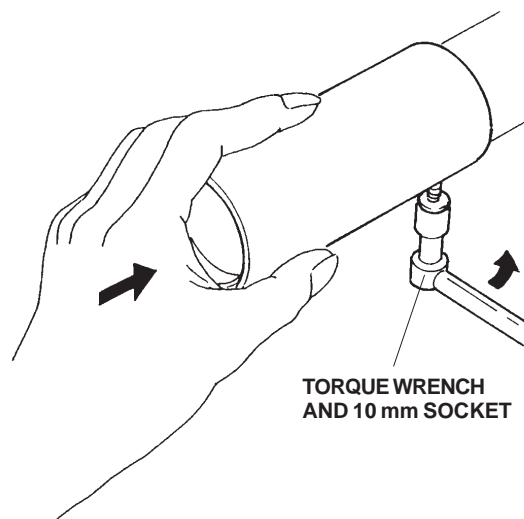

5. Start the engine, and rev it up a few times. Listen for any rattling noise coming from the exhaust pipe finisher, and adjust as necessary.